


DS-8104AHFLI-S ATM/POS DVR



Key Features

- Each channel supports up to 4CIF real time recording
Dual stream
- VGA output
- HDD group management
- 4-SATA interface for local storage

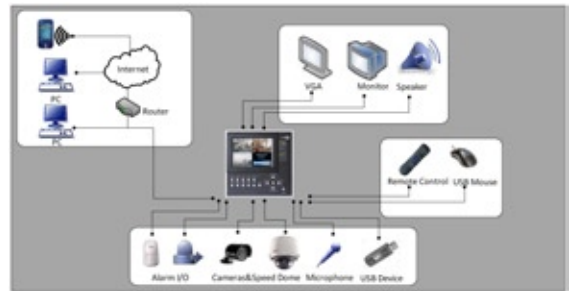

Specifications

		DS-8104AHFLI-S
Video/Audio input	Video compression	H.264
	Video input	4-ch, BNC (1.0Vp-p, 75Ω) PAL/NTSC adaptive
	Audio compression	OggVorbis
	Audio input	4-ch, BNC (2Vp-p, 1kΩ)
	Voice talk input	1-ch, BNC (2Vp-p, 1kΩ)
Video/Audio output	Preview resolution	PAL: 704x576 NTSC: 704x480
	VGA output	1, resolution: 1024x768/60Hz
	Playback resolution	4CIF/DCIF/2CIF/CIF/QCIF
	Video output	1-ch BNC (1.0Vp-p, 75Ω), 1-ch RCA (1.0Vp-p, 75Ω)
	Frame rate	PAL: 1/16~25fps, NTSC: 1/16~30fps
	Bit rate	32Kbps~2Mbps, or user defined
	Audio output	1-ch BNC (linear, 600Ω) 1-ch RCA (linear, 600Ω)
	Synchronous playback	4-ch playback
	Audio Bit rate	16kbps
Hard disk	Interface type	4 SATA interface
	Capacity	Each supports up to 2TB capacity
External interface	Network interface	1, RJ45 10M/100M adaptive Ethernet
	Serial interface	1 RS-232 interface (for parameters configuration, maintenance, transparent channel); 1 RS-485 interface (for PTZ control);
	USB interface	3, USB2.0
	Alarm in	5
	Alarm out	2
Others	Power supply	100-240V AC, 47~63 HZ
	Consumption (without hard disk)	≤40W
	Working temperature	-10°C~+55°C(14°F~131°F)
	Working humidity	10%~90%
	Dimension	180(H)×180(W)×280mm(D)(7.09"(H)×7.09"(W)×11.02"(D))
	Weight (without hard disk)	≤5000g(11.02lbs)