




Monitor Series

MONOCHROME MONITOR

MONOCHROME MONITOR			
Model No.	PMH-014	PMH-017	PMH-020
Input Voltage	117 / 230Vac	96 ~ 256Vac	
System	CCIR or EIA		

- Input Signal : 0.5Vp-p ~ 2.0Vp-p Composite Video
- Input Impedance : 75Ω/High, Switchable
- Bandwidth : 100Hz ~ 10MHz
- Video Gain : 30dB
- Resolution : 800TV lines at center
- Scanning Frequency : Horizontal : 15.750kHz (15.625kHz)
Vertical : 60Hz (50Hz)
- Video Input : BNC
- Power Consumption : 35W(PMH-014), 45W(PMH-017), 48W(PMH-020)
- Operating Temperature : -10°C ~ +55°C
- Dimension(WxHxD) : 327 x 325 x 327(PMH-014)
: 421 x 420 x 428(PMH-017)
: 361 x 473 x 456(PMH-020)
- Weight : 14Kg(PMH-014), 15Kg(PMH-017), 19.5Kg(PMH-020)
- Ext.Modle : PMH-014A, PMH-017A, PMH-020A(with audio)

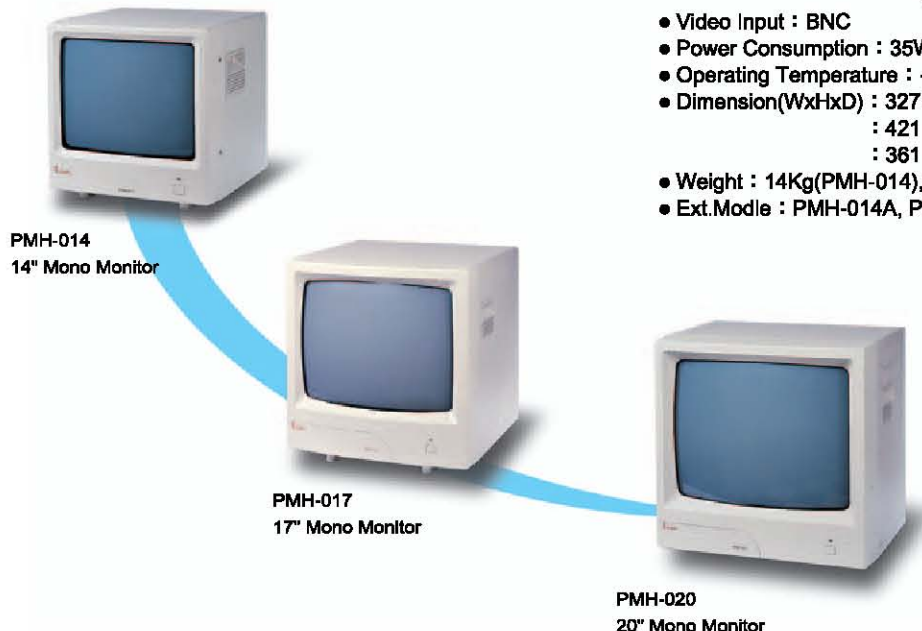

COLOR MONITOR

COLOR MONITOR			
Model No.	PMH-215C	PMH-217C	PMH-221C
Input Voltage	96~256 Vac		
System	NTSC or PAL		

- Input Signal : 0.5Vp-p ~ 2.0Vp-p Composite Video
- Input Impedance : 75Ω/High, Switchable
- Bandwidth : 8MHz(PMH-215C, PMH-217C) 6MHz(PMH-221C)
- Video Gain : 30dB
- Resolution : Center 520, Corner 500(PMH-215C, PMH-217C)
: Center 450, Corner 430(PMH-221C)
- Scanning Frequency : Horizontal : 15.734kHz (15.625kHz)
Vertical : 59.94Hz (50Hz)
- Video Input : BNC x 2
- Audio Input : Phono Jack x 2
- Power Consumption :
48W(PMH-215C)
50W(PMH-217C)
75W(PMH-221C)
- Operating Temperature :
-10°C ~ +55°C
- Dimension(WxHxD) :
400 x 358 x 362(PMH-215C)
470 x 415 x 420(PMH-217C)
495 x 485 x 450(PMH-221C)
- Weight : 16Kg(PMH-215C),
21Kg(PMH-217C), 28Kg(PMH-221C)

