


SIEMENS

Weatherproof Protective Camera Housing CHM / CHH

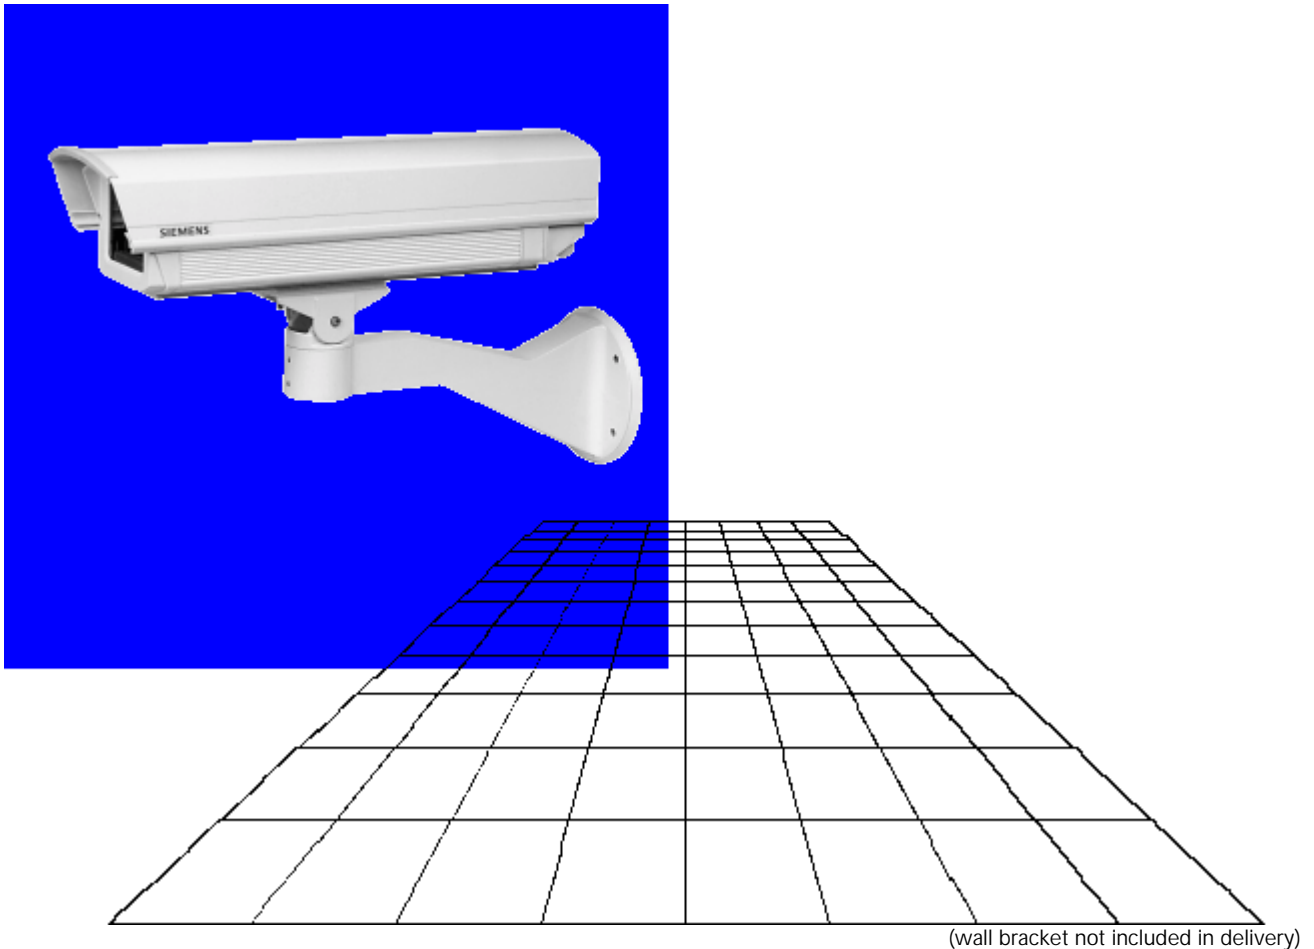

Main features of protective housing

- Usable mounting length 320 mm
- Improved folding mechanism
- Easy to mount and service
- Integrated handle at rear
- 3 cable inlets (2 x PG 9, 1 x PG 16)
- Degree of protection IP 66
- Sunshield, heater and thermostat included in delivery
- Integrated gutter on front sunshield

Additionally with the CHH version

- Integrated connector
(internal multipoint connector)
- Integrated distribution board
to facilitate mounting and servicing

Ordering data

Designation	Order No.	Approx. weight (kg)
Protective camera housing CHM Weatherproof housing 330 mm, incl. sunshield with gutter, 3 PG screwed glands for cables, camera mounting plate with anti-slip surface, window heater 110 to 265 V AC and thermostatic switch, housing painted in RAL 9002	2GF1705-8EA	2,8
Protective camera housing CHH Weatherproof housing 330 mm, incl. internal connection and distribution board, sunshield with gutter, 3 PG screwed glands for cables, camera mounting plate with anti-slip surface, window heater 110 to 265 V AC and thermostatic switch, housing painted in RAL 9002	2GF1705-8FA	2,9
Accessories		
Wall bracket for CHM / CHH protective camera housing (RAL 9002)	2GF1705-8GB	1,3
Pole console for CHM / CHH protective camera housing (RAL 7032)	2GF1705-8GC	0,9
Ceiling suspension for CHM / CHH protective camera housing (RAL 7032)	2GF1705-8GD	3,0
Mains distributor for CHM protective camera housing with fuse	2GF1705-8EB	0,1
Built-in power supply unit for CHM / CHH protective camera housing 230 V AC / 12 V DC, 600 mA stabilized	2GF1705-8GA	0,5

Technical data

Type	CHM	CHH
Housing material	Center section: extruded or diecast aluminum Front and rear sections: robust plastic	
Cable inlet	2 x PG 9, 1 x PG 16 with triple inlet	
Distribution board, internal multipoint connector	No	Yes
Paint	RAL 9002 (powder coating)	
Degree of protection	IP 66	
Temperature range with heater	-30 °C to +60 °C	
Switching points of thermostat	16 °C on / 20 °C off	
Power supply for heater	230 V AC, approx. 7 Watt	
Outer dimensions mm (LxWxH)	473 x 133 x 125	
Usable internal dimensions mm (LxWxH)	320 x 90 x 76	

Issued by
SGT Identifikationssysteme,
CEVIS VIDEO SYSTEMS
D-76181 Karlsruhe



This document may not be duplicated nor its contents used or communicated to others without express authority!
Delivery subject to available, right of technical modifications reserved.

We are building security.

Cerberus Division

Siemens Gebäudetechnik GmbH & Co. oHG

Order No. A24205-A336-A795-*-7604

Issue 05/00 CCTV PL-1
Printed in the Federal Republic of Germany
on environment-friendly chlorine-free paper