


2-WIRE TRANSMITTER

2GF1714-8WN

Connections:

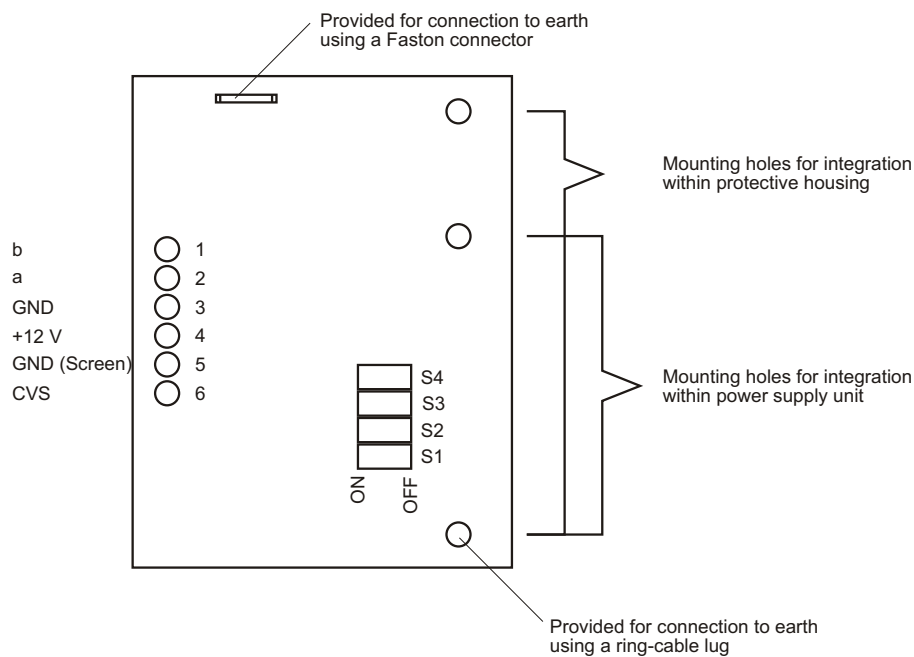

Switch positions:

Output voltage without accentuation	S2	S3
2.0 Vpp	off	off
2.6 Vpp	on	off
3.2 Vpp	on	on
Frequency-dependent accentuation	S1	S4
no frequency-dependent accentuation	off	off
frequency-dependent accentuation (approx. 6 dB with 5 MHz)	off	on
frequency-dependent accentuation (approx. 6 dB with 5 MHz)	on	off
frequency-dependent Accentuation (approx. 12 dB with 5 MHz)	on	on

Condition on delivery: Output voltage 2.6 Vpp without accentuation

To ensure correct functioning the transmitter must be connected to earth !