



IRM270CTUK

Matchtec®

PIR/MW motion detector

with Adaptive Real-Time anti-mask surveillance


- 18 m wide-angle detection with look down zone or 25 m continuous curtain (option)
- Digital MATCHTEC® signal processing
- MW part is disengageable during unset mode
- Outstanding white light filter thanks to black triplex mirror optics
- Separate application settings for PIR and MW

Always the right choice. The detector's design makes it easy to incorporate into any surroundings. Because two detection systems are used – microwave and passive infrared as well as the MATCHTEC® signal processing – this detector is suitable for demanding applications. It is extremely simple to adapt to the room size.

The IRM270CTUK is intelligent. Reliable recognition of intruders is ensured thanks to sophisticated digital MATCHTEC® signal processing and interconnection between the microwave and passive-infrared sections. To achieve this, both subsystems are subject to a multi-criteria analysis, and any unwanted interference is recognized and suppressed by the individual subsystems.

This detector can't be fooled. The IRM270CTUK is protected against accidental or sabotage masking. It is monitored of anything that has an influence on this circuitry, e.g. spray, foils, hats, boxes, coats, etc.

Coverage areas and dimensions

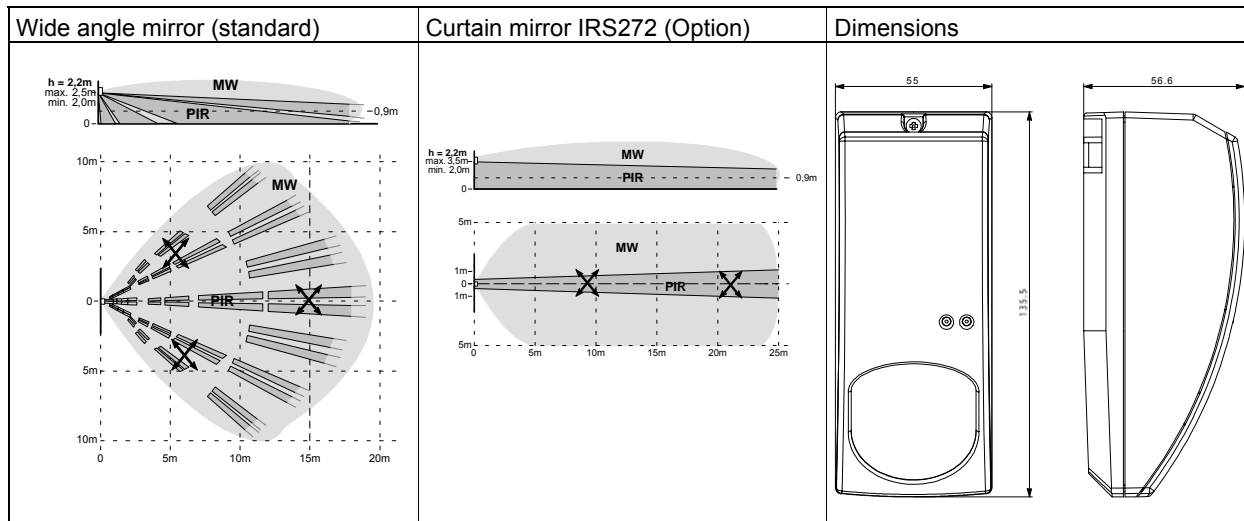

Technical data

Supply voltage	9 ... 16 VDC (12 V nom.)
– Max. ripple (0 ... 100 Hz)	2.0 VPP
– Voltage monitoring	Alarm at 8.0 ± 0.5 VDC
Current consumption (at 8 ... 16 VDC)	
– Quiescent / Alarm	8.0 mA / 15 mA
Microwave (MW)	10.687 GHz
Alarm output	
– Semiconductor relay (opens at alarm)	30 VDC / 100 mA ohmic load / Ri < 35 Ω
– Alarm holding time	2 ... 3 s
Disturbance & antimask output	
– Semiconductor relay (opens at alarm)	30 VDC / 100 mA ohmic load/ Ri < 35 Ω
Tamper contact	30 VDC / 100 mA ohmic load
Control inputs	LOW ≤ 1.5 V / HIGH ≥ 3.5 V
Walking speeds	
– Wide angle mirror / curtain mirror IRS272	0.1 ... 4.0 m/s / 0.1 ... 4.0 m/s
Signal evaluation	MATCHTEC®
Environmental conditions	
– Operating temperature	- 20 ... + 55°C
– Storage temperature	- 20 ... + 60°C
– Air humidity (EN 60721)	< 95% rH, non-condensing
– EMC up to 2 GHz	30 V/m
– Housing protection class (EN 60529, EN 50102)	IP41 / IK02

Ordering data

Type	Art. No.	Designation	Weight
IRM270CTUK	A5Q00007894	PIR/MW Motion Detector with ART	0.130 kg
IRS272	571733	Curtain mirror (4 pcs)	0.055 kg
IRUM20	562247	Mounting bracket, wall	0.100 kg
IRUM30	562250	Mounting bracket, ceiling	0.160 kg
	503251	Adhesive tamper seal	0.007 kg

Siemens Switzerland Ltd.
 International Headquarters
 Fire Safety & Security Products
 Gubelstrasse 22
 CH – 6301 Zug
 Tel. +41 41 724 24 24
 Fax +41 41 724 35 22
 www.sbt.siemens.com

© 2005 Copyright by
 Building Technologies Group
 Data and design subject to change without notice. Supply subject to
 availability.