

KPC-650CHQ

NEW






Introduction

KPC-650CHQ uses the Sony HQ1 Chipset with their ExView HAD CCD for a high quality low light performance.

Special Features

- ⊙ C/CS Mount with DC or Video Driven Lenses
- ⊙ 550 TV Lines
- ⊙ 0.05 Lux @ Faceplate
- ⊙ Optional Mirror Mode

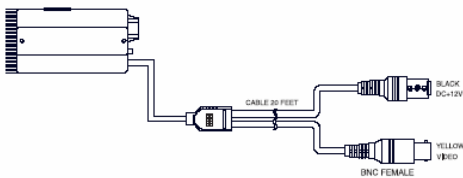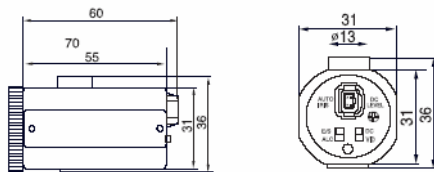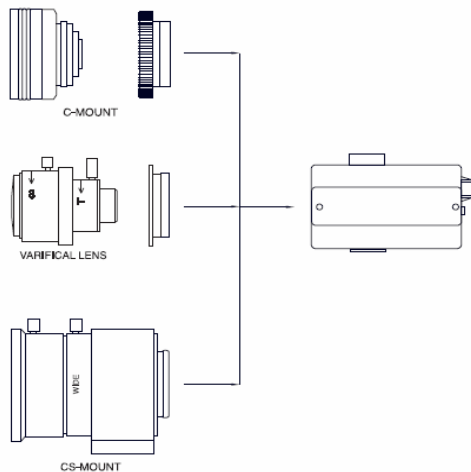

MODEL	KPC-650CHQ
Image Device	SONY 1/3" Super HAD CCD w/ HQ1 Shipset
Effective Pixels	NTSC:768(H) x 494(V)(High Res.)
Horizontal Resolution	550 TV Lines (High Res.)
Sensitivity	0.05 Lux @ Faceplate
S/N Ratio	More than 45dB (AGC Off)
Scanning System	2:1 Interlace
Sync System	Internal
Gamma Correction	$\gamma=0.45$
Video Output	Composite 1 [Vr-r] 75(Ω) unbalanced
Electronic Shutter	1/60 ~ 1/100,000sec Auto
Power Supply	DC12V ($\pm 10\%$)
Operating Temperature	-10°C ~ +60°C (Humidity : 10%RH ~ 60%RH)
Gain Control	Automatic
White Balance	Automatic (2,100 ° K ~ 8,000 ° K)
Lens Option	C/CS mount lenses
Option	Mirror Mode
Dimensions	31mm(W) X 31mm(H) X 55mm(L)

Specifications may change without prior notice or liability

KT&C USA

KT&C USA, Inc.

3240 Wilshire Blvd., Suite 501 Los Angeles, CA 90010

T : 213-381-0061 F : 213-381-0064

Email : sales@ktncusa.com www.ktncusa.com

