

PIH-012/014


- High Efficiency Jack IR LED with 0.25W Output Power: Radiant Distance 40M
- Indoor / Outdoor Applications
- Adopt "Special Optical Low Pass Filter"
- Aluminum PCB for Fast Heat Dissipation
- Automatically Activates LED: Below 10 Lux
- Aluminum Housing with IP 66 Rating
- Unique Front Glass Design Separates Lens from IR LEDs
- Optional 6, 8, 12 & 16mm Lens
- Optional Heater:
Heater Activation: On <15°C(59°F)
Off >25°C(77°F)
- Operating Temp.: -30°C~+50°C
(-22°F~+122°F)



Ultrahigh Sensitivity 40M IR Camera



Dimension Unit : mm

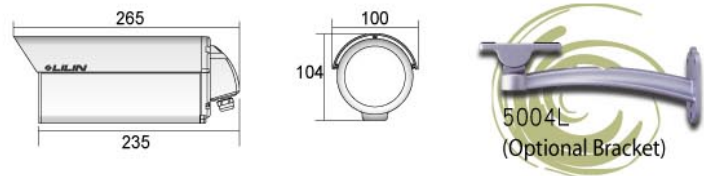

Specifications

Model	NTSC	PIH-0124N8	PIH-0127N8	PIH-0124N6	PIH-0127N6	PIH-0144N8	PIH-0147N8	PIH-0144N6	PIH-0147N6	
	PAL	PIH-0124P8	PIH-0123P8	PIH-0124P6	PIH-0123P6	PIH-0144P8	PIH-0143P8	PIH-0144P6	PIH-0143P6	
Power Input Voltage		AC 24V±10%	AC 117V	AC 24V±10%	AC 117V	AC 24V±10%	AC 117V	AC 24V±10%	AC 117V	
		AC 24V±10%	AC 230V	AC 24V±10%	AC 230V	AC 24V±10%	AC 230V	AC 24V±10%	AC 230V	
Lens	Focal Length	8.0mm		6.0mm		8.0mm		6.0mm		
	Iris	F2.0		F1.8		F2.0		F1.8		
	Angle of View	H	32°		44.5°		32°		44.5°	
		V	24°		33.1°		24°		33.1°	
	D	40°		56°		40°		56°		
Pick Up Element		Sony 1/3" ExView HAD CCD Sensor								
Effective	NTSC	510(H) x 492(V)				768(H) x 494(V)				
Pixels	PAL	500(H) x 582(V)				752(H) x 582(V)				
Chip Size		6.00mm(H) x 4.96mm(V)								
H / V Sync.	NTSC	15.734KHz / 59.94Hz								
Frequency	PAL	15.625KHz / 50Hz								
Sync. Mode		Internal								
Scanning System		2 : 1 Interlace								
Resolution		380 TV Lines				480 TV Lines				
Min. Illumination		0.01 Lux / F1.8				0.05 Lux / F1.8				
		0 Lux with IR On				0 Lux with IR On				
S/N Ratio		More than 50dB (AGC OFF)								
Auto Gain Control		36dB Variable Gain								
White Balance		ATW								
Aperture Gain Correction		Horizontal, Vertical								
Electronic Shutter		1/60(1/50)S ~ 1/100,000S (Auto)								
Back Light Compensation		Auto								
Video Output		CVBS1.0Vp-p , 75Ω								
Gamma Characteristic		γ = 0.45								
Power Consumption		10W								
IP Rating		IP 66								
Window		Φ88 Heat Resistant Glass								
Infrared LED	Peak Wavelength	850nm								
	Beam Spread	20°								
	Radiant Distance	25M (f=6mm) / 30M (f=8mm) / 35M (f=12mm) / 40M (f=16mm)								
Operating Temperature		-10°C ~ +50°C (14°F ~ 122°F)								
Dimension		Φ100 x 235mm								
Weight		1500g								